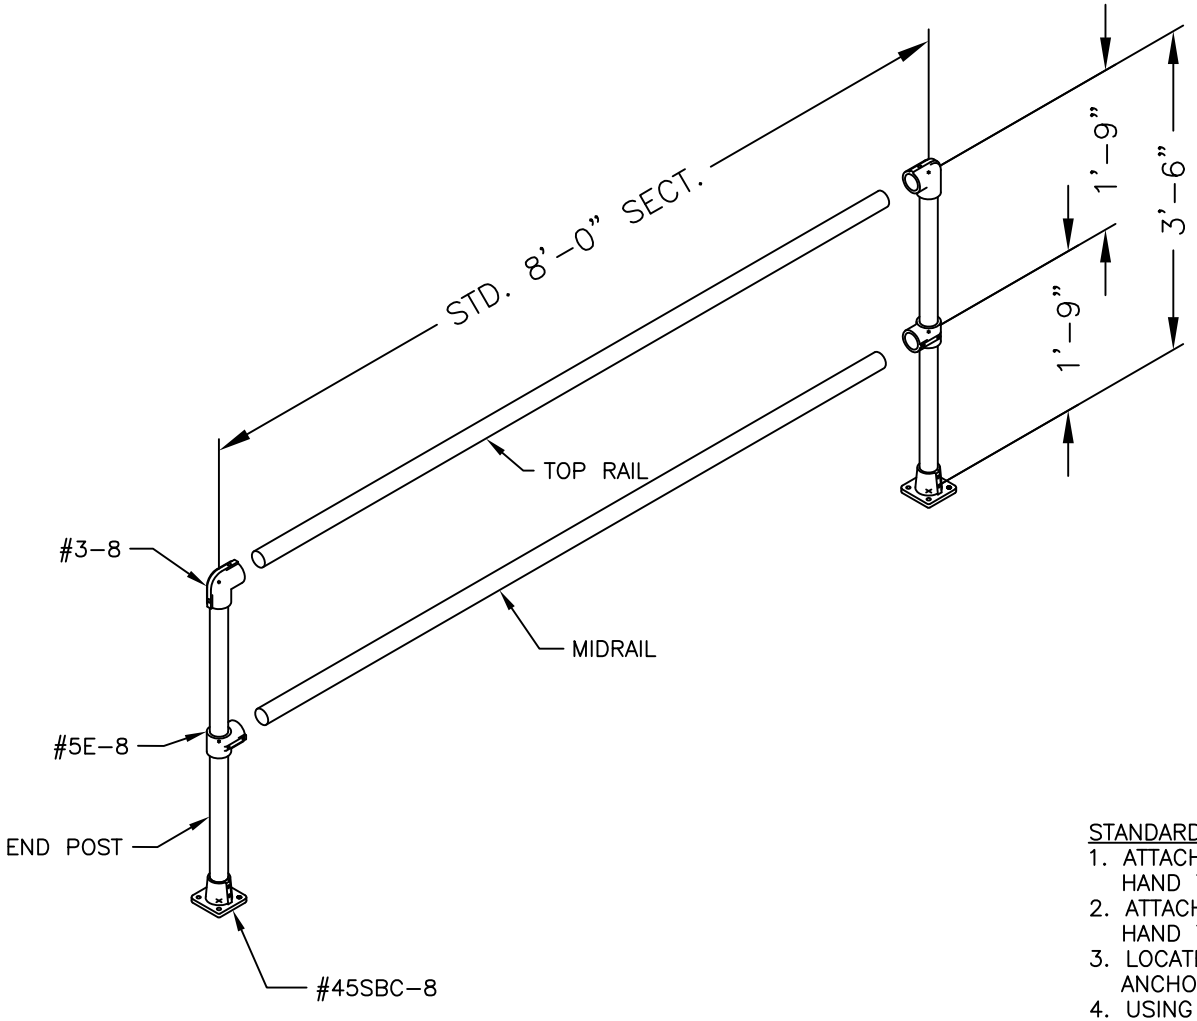

STANDARD 8'-0" SECTION:

1. ATTACH TOP RAIL AND MID RAIL TO ONE END POST. HAND TIGHTEN SETSCREWS.
2. ATTACH OTHER END POST TO TOP RAIL AND MID RAIL. HAND TIGHTEN SETSCREWS.
3. LOCATE RAIL ASSEMBLY AND ANCHOR INTO POSITION. ANCHORS NOT PROVIDED.
4. USING A LEVEL, CHECK THAT POST ARE VERTICAL AND RAILS ARE LEVEL.
5. TIGHTEN ALL SETSCREWS.

THIS DRAWING AND ALL THE INFORMATION THEREON IS THE PROPERTY OF THE HOLLAENDER MFG. CO., IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC, NOR COPIED, NOR USED, TO THE DISADVANTAGE OF SAID HOLLAENDER MFG. CO. AND IS SUBJECT TO RETURN ON DEMAND.

COPYRIGHT 2013, HOLLAENDER® MANUFACTURING CO.

NO.	REVISIONS	DATE	APPROVED
0	RELEASED FOR APPROVAL	1-15-13	BW

Hollaender®
STRUCTURAL ENGINEERING GROUP
10285 WAYNE AVENUE
CINCINNATI, OH 45215-6399
PHONE: (800) 772-8800 FAX: (800) 772-8806
WWW.HOLLAENDER.COM

PROJECT	CUSTOMER	DESCRIPTION
STRAIGHT RAIL SECTION 8'-0" c/c POST 42" HIGH RAIL		MODULAR RAIL SECTION DRAWINGS

DRAWN BY: GG	APPROVED BY: BW	DATE: 1-15-12	
PROJECT NO.: 50240		SCALE: NTS	
FINISH: MILL		DRAWING NO.: 7062-S	
MATERIAL: ALUM. PIPE/ALUM FITTING		SHEET 1 OF 1	